

CME-MCB3225-SERIES

≥ 1210 inch (Dimensions code JIS[EIA])



Features


- ▶ Closed magnetic circuit avoids crosstalk.
- ▶ Suitable for reflow soldering
- ▶ Shapes and dimensions follow E.I.A. spec.
- ▶ Available in various sizes..
- ▶ Excellent solder ability and heat resistance.
- ▶ High reliability

Applications

- ▶ Computers and peripheral devices, personal computers, VCR and cameras.
- ▶ Communication equipment.




Dimension (Unit:mm)

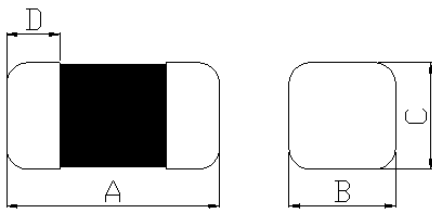

A	B	C	D
3.2±0.2	2.5±0.2	1.3±0.2	0.5±0.2

Land Pattern (Unit:mm)







L	G	H
4.40	1.20	2.70

Specifications

Part Number	Impedance (Ohm)	Tolerance (±)	DCR (mohm) Max	Rated Current (mA) Max	Test Frequency (MHz)
CME-MCB3225UF-310T	31	25%	0.20	400	100
CME-MCB3225UF-330T	33	25%	0.20	400	100
CME-MCB3225UF-520T	52	25%	0.20	400	100
CME-MCB3225UF-600T	60	25%	0.20	800	100

Electrical Characteristics

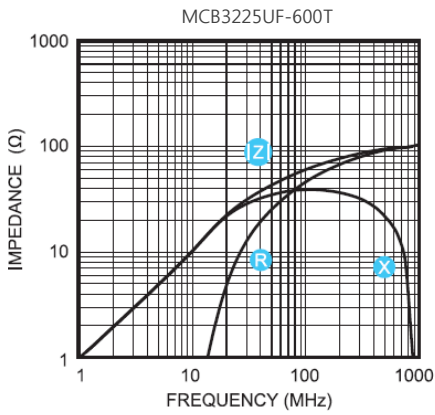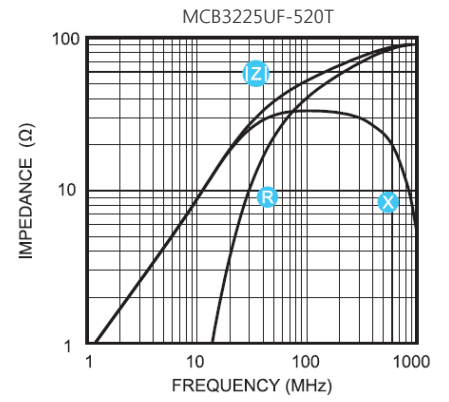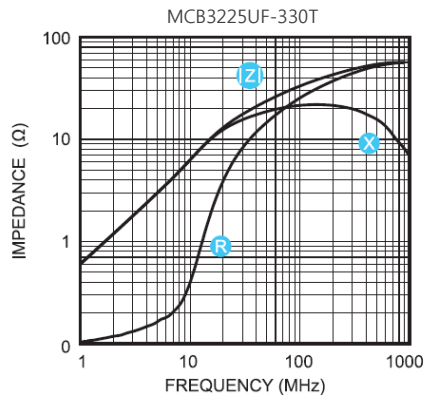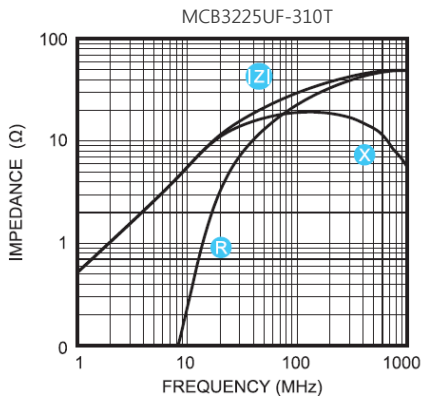

Ilsan Sales Office (KOREA)
 H.K Sales Office (HongKong)
 Shenzhen Sales Office (CHINA)
 LA Sales Office (USA)
 Hungary Sales office (EUROPE)

+82)31-904-1444
 +852)2711-5551
 +0755-8663-6929
 +1)866-446-3586
 +36)30-521-7818

coilmaster@coilmaster.com
coilmaster@coilmaster.com
kimha@coilmaster.com
markyang@coilmaster.com
coilmaster@coilmaster.com